


CREW CAB 3500 169.5"WB SRW 4x4 SPRING SUSPENSION

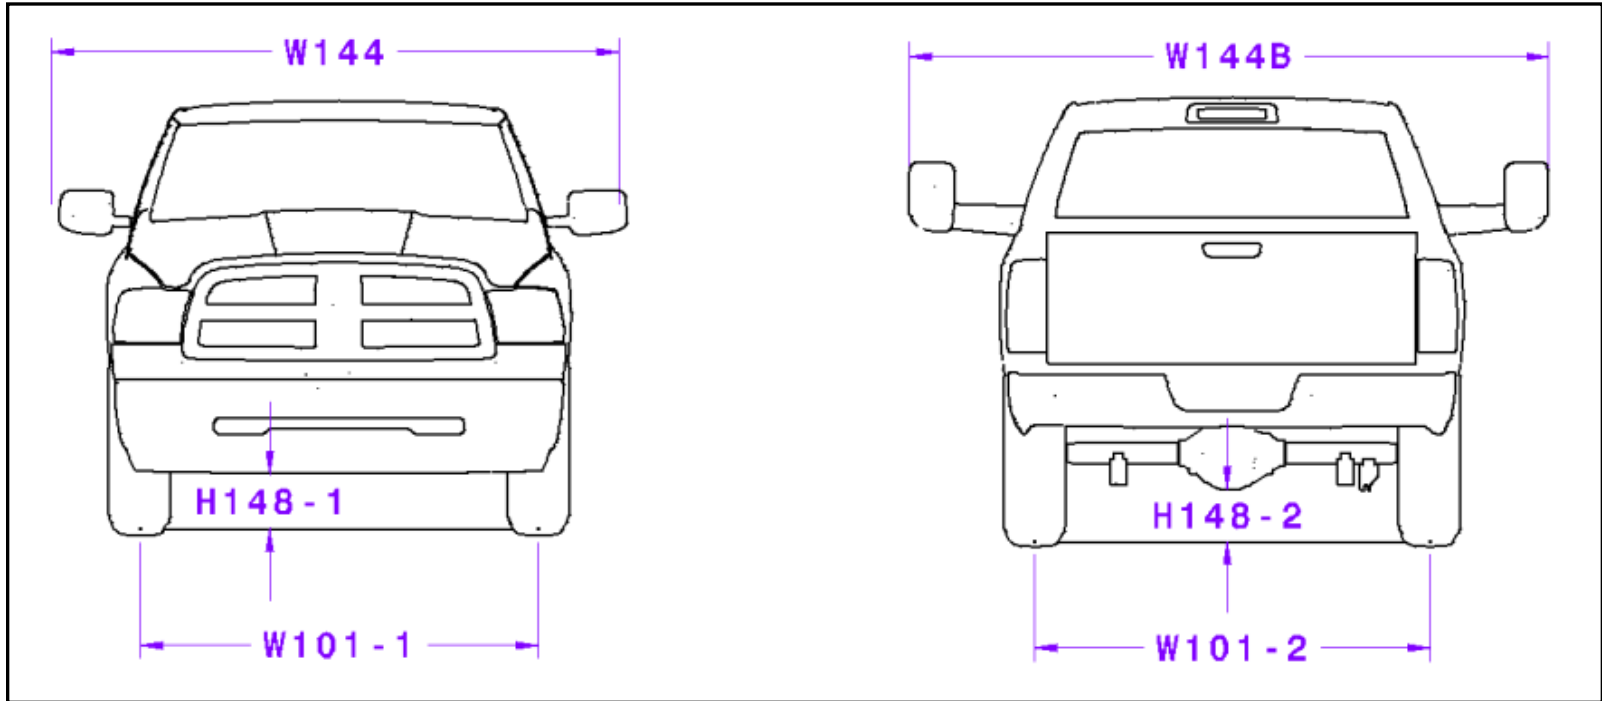

CREW CAB 3500 169.5"WB SRW 4x4 SPRING SUSPENSION

Code	Description	Metric	English
CG_TRL1	Rear Bumper to Back of Cab	2726.4 mm	107.3 in
CG_TRL2	Fuel Tank Length	1642.2 mm	64.6 in
L50-2	SgRP Couple Distance, Front to Second	939.8 mm	37.0 in
L103	Vehicle Length	6586.5 mm	259.3 in
L403	Front Bumper to Back of Cab (BBC)	3861.8 mm	152.0 in
L410	Cab Length	2574.3 mm	101.4 in
L504	Cab to Pickup Body	21.0 mm	0.8 in

Code	Description	Metric	English
A18	Steering Wheel Angle	22.9 deg	22.9 deg
A130-1	Glazing Angle - Windscreen	56.4 deg	56.4 deg
CG_A18	Steering Column Angle	23.4 deg	23.4 deg
CH16	Top of Box to Top of Cab Roof	605.2 mm	23.8 in
CH17	Box Floor to Cab Roof	1107.5 mm	43.6 in
CH514	Box Floor to Top of Fuel Tank	93.8 mm	3.7 in
H6	SgRP - Front to Windshield Lower DLO	458.2 mm	18.0 in
H61-1	Effective Head Room - Front	1041.4 mm	41.0 in
H61-2	Effective Head Room - Second	1013.5 mm	39.9 in

Code	Description	Metric	English
CG_TRW1	Outside Rail to Fuel Tank(inside)	434.2 mm	17.1 in
W144	Vehicle Width-Mirrors Included (Std)	2464.4 mm	97.0 in
W144B	Vehicle Width-Mirrors Included (Trailer)	2776.1 mm	109.3 in
W106	Fender Width - Front	2003.6 mm	78.9 in
W107	Fender Width - Rear	2013.1 mm	79.3 in
W116	Body Width-maximum	2017.4 mm	79.4 in
W117	Body Width At SgRP - Front	2008.7 mm	79.1 in
W120-1	Vehicle Width, Doors Open - Front	4076.6 mm	160.5 in
W120-2	Vehicle Width, Doors Open - Rear Row	3883.7 mm	152.9 in
W201	Cargo Width-Wheelhouse	1295.4 mm	51.0 in

CREW CAB 3500 169.5"WB SRW 4x4 SPRING SUSPENSION

Code	Description	275/70R18		285/60R20	
		Metric	English	Metric	English
A106-1	Angle of Approach	25.1 deg	25.1 deg	25.5 deg	25.5 deg
A106-2	Angle of Departure	24.4 deg	24.4 deg	24.6 deg	24.6 deg
A147	Ramp Breakover Angle	19.3 deg	19.3 deg	19.6 deg	19.6 deg
CG_H511	Bottom of Open Hood to Ground	2238.8 mm	88.1 in	2243.9 mm	88.3 in
CG_L513	Rear Axle to Inside Box at Rear	1065.7 mm	42.0 in	1065.7 mm	42.0 in
CG_TRL3	Rear Wheel Center line to Fuel Tank	167.9 mm	6.6 in	167.9 mm	6.6 in
CG_TT18	Turn Circle Diameter (feet/meters)*	16.1 m	53.0 ft	16.1 m	53.0 ft
H5-1	SgRP to Ground - Front	1045.3 mm	41.2 in	1049.9 mm	41.3 in
H5-2	SgRP to Ground - Second	1077.6 mm	42.4 in	1081.8 mm	42.6 in
H101	Vehicle Height(curbLoad)	2022.3 mm	79.6 in	2026.7 mm	79.8 in
H103-1	Fascia(Bumper) to Ground - Front	327.9 mm	12.9 in	333.0 mm	13.1 in
H103-2	Fascia(Bumper) to Ground - Rear	536.8 mm	21.1 in	540.3 mm	21.3 in
H108-1	Static Load Radius - Front Tire *	395.0 mm	15.6 in	399.9 mm	15.7 in
H108-2	Static Load Radius - Rear Tire *	406.2 mm	16.0 in	410.0 mm	16.1 in
H130-1	Step Height - Front	691.8 mm	27.2 in	696.4 mm	27.4 in
H130-2	Step Height - Second	699.0 mm	27.5 in	703.4 mm	27.7 in
H148-1	Suspension or Axel to Ground - Front	231.8 mm	9.1 in	236.7 mm	9.3 in
H148-2	Suspension or Axel to Ground - Rear	217.5 mm	8.6 in	221.3 mm	8.7 in
H194	Closed Endgate Height	1505.0 mm	59.3 in	1508.5 mm	59.4 in
H196	Lift In Height	991.2 mm	39.0 in	994.6 mm	39.2 in
L101	Wheelbase	4299.2 mm	169.3 in	4299.2 mm	169.3 in
L104	Overhang - Front	1005.3 mm	39.6 in	1005.3 mm	39.6 in
L105	Overhang - Rear	1281.9 mm	50.5 in	1281.9 mm	50.5 in
L114	Front Wheel Centerline toSgRP - Front	1471.6 mm	57.9 in	1471.6 mm	57.9 in
L404	Cab to Rear Axle (CA)	1443.4 mm	56.8 in	1443.4 mm	56.8 in
W101-1	Tread Width - Front Tires	1719.0 mm	67.7 in	1724.0 mm	67.9 in
W101-2	Tread Width - Rear Tires	1703.6 mm	67.1 in	1708.6 mm	67.3 in